

Principle of Operation

The Leakwise ID-221 Oil Sheen Monitoring System uses the industry leading technology of Electromagnetic Energy Absorption. The instruments consist of a very high frequency transmitter connected to a mismatched antenna. The antenna is immersed in the monitored fluids. The higher the energy absorption of the fluid, the more the loading on the antenna, and therefore, more energy which has to be supplied by the transmitter. Since water absorbs much more energy than hydrocarbons and air, the loading in water is higher. If the antenna is surrounded by an oil layer or oil/water mixture, the loading is reduced in proportion to the reduction in water content. This unique, patented technique enables the detection of small layers of oil. It also enables continuous monitoring of an oil buildup and the measurement of its thickness.

ID-221 Description

The high frequency transmitter is mounted on a patented float, which maintains its position precisely at the liquid/air interface, despite fluctuations in the liquid level. It has two field adjustable alarm points for:

- Low oil alarm – upon detecting the presence of a predefined layer of hydrocarbons.
- High oil alarm – upon detecting when the hydrocarbon layer has continued to build up to a second predefined thickness.

The ID-221 can detect as little as 0.3 mm layer of oil on water reliably, repeatedly and without false alarms. It can also monitor on-line changes in oil layer thickness. The signal processor relays are used for local and remote alarm and control. Delay in the relays' response time enables reliable detection regardless of occasional waves or turbulence. A stilling well can be used for extreme conditions. A built-in test feature is continuously monitoring failure free system operation.

Applications

The ID-221 can be installed in wet sumps or tanks and in groundwater monitoring wells to detect oil sheen resulting from leaking underground storage tanks and pipelines. It is also used to monitor hydrocarbons and other organic solvents during site assessment and remediation.

Additional applications are available in detecting and monitoring floating hydrocarbons in: sewer systems, wastewater treatment systems, oil/water separators, cooling water trenches and canals, storm water run-offs, retention ponds and boiler condensate tanks.



ID-221 Technical Specifications

Operational and Design Information

Operation Floating detector capable of monitoring hydrocarbons and other organic solvents on water

Operating Range

Resolution 0.3 mm of hydrocarbon on water or brine
Water Level Variation Minimum: 30 cm from the bottom of a well/tank/sump
Maximum: more than 10 m
Temperature Detector: 0° C to 70° C, higher temperature available
PS-220 Signal Processor: -40° C to 85° C

Materials

Detector Hydrocarbon resistant polymers, 316 stainless steel

Dimensions

Cable 10 m standard with detector, additional length to order
Detector Diameter 87 mm, height 150 mm, Fits into 4 inch (96 mm) still wells
PS-220 Enclosure NEMA 4X (IP-65): 275 x 230 x 130 mm; NEMA 7: 215 x 260 x 175 mm
EEx d: 305 x 235 x 190 mm

Electrical Rating


Wiring Connections 18 AWG maximum
Input Power Options 220/110 VAC, 12/24 VDC (@3.5 Watts), 12/24 VDC solar powered
Distance to PS-220 Up to 1200 m subject to hazardous area restrictions
Wireless See Leakwise WL data sheet for battery powered wireless operation
PS-220/RL/LI Basic Analog Signal Processor and power supply including:
2 Alarm Relay Contacts: SPDT Rated 3A at 220 Volts normally open and normally closed and
3 indicating lights: Air/Oil/Water, built-in diagnostics feature

Output Options

420 4-20 mA signal proportional to hydrocarbon thickness up to 1 inch (25 mm)—current source
420/BG Bar-Graph display (20 Bars) of hydrocarbon thickness and 4-20 mA output
AUD Audio Alarm
WL Wireless communication (see Leakwise WL data sheet)
DSP-220 Digital Signal Processor for Multiple ID-220 Series Sensor Control with data logging capabilities and various output options, including: relays, lights, 4-20 mA and RS-232 or RS-422 communications (See DSP-220 data sheet for more details)

Certifications

ID-221 Detector Intrinsically Safe—EEx ia IIC T4
PS-220 Enclosure Explosion Proof: North America – NEMA 7, Class I, Div. 1, Groups C & D
Europe – EEx d IIC T6
Combined System Approved for operation in hazardous location
Performance EPA – Conforms to EPA/530/UST-90-009 for groundwater monitoring systems
TÜV – Type approval in accordance with WHG (Water Resources Law) § 19 h

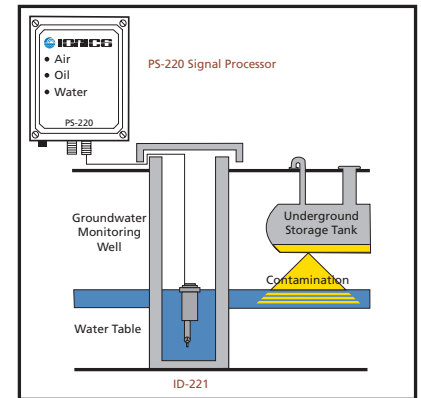

Instrument Business Group
6060 Spine Road, Boulder, CO 80301 USA
phone 800.255.6964 · 303.444.2009 · fax 303.444.9543
sales@leakwise.com

www.leakwise.com

Unit 3 Mercury Way, Mercury Park Estate, Trafford Park,
Manchester, UK M41 7LY
phone 44.161.866.9337 fax 44.161.866.9630
office@ionicsinstruments.co.uk

MC01-061
Printed in USA © 2001